

ViewSonic® PROJECTOR LS900WU


Key Features

- Laser phosphor technology
- 6,000 ANSI Lumens
- 30,000 hours of maintenance-free projection
- H/V lens shift
- 1.65X optical zoom



Product Description

Bright and versatile for any professional installation, the ViewSonic LS900WU WUXGA laser projector delivers everything you need for big screens in big venues. Delivering 6,000 ANSI lumens of advanced high brightness, a 100,000:1 contrast ratio, and up to 30,000 hours of light source life, this projector is ideal for auditoriums, lecture halls, large boardrooms and more. Thanks to SuperColor™ technology, content is brought to life with captivating visuals, crisp graphics, and superior colour reproduction. It is also easy to deploy and manage with its wide 1.65x optical zoom adjustment, vertical/horizontal keystone correction, 4 corner adjustment, and a vertical/horizontal lens shift feature – all providing maximum flexibility in even the most challenging installations. Moreover, 360-degree tilt angle projection, portrait mode, and 24/7 operation allow for several mounting options. The ViewSonic LS900WU is the ideal WUXGA laser projector for professional installations and large venues, as well as business and education environments.

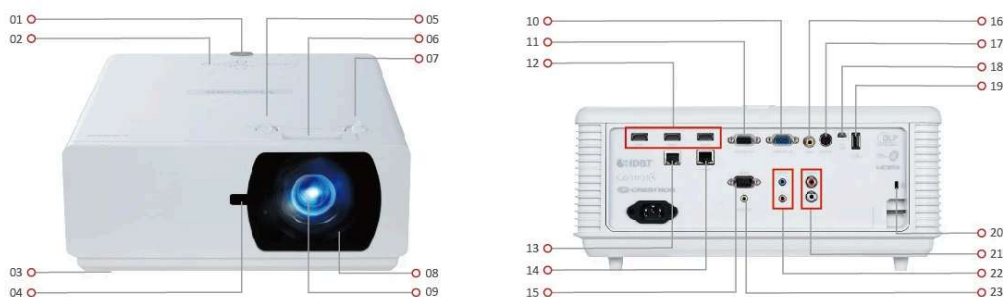

Visit Us

www.viewsonic.com

SPECIFICATION

Projection System:	0.67" WUXGA
Native Resolution:	1920x1200
Brightness:	6000 ANSI Lumens
Contrast Ratio with SuperEco Mode:	3000000:1
Display Colour:	1.07 Billion Colours
Light Source Type:	Laser Phosphor system
Light Source Life (Normal):	20000
Light Source Life (SuperEco):	30000
Lamp Watt:	Laser Bank x 4
Lens:	F=2.45-3.13, f=17.23-27.9mm
Projection Offset:	130%+/-10%
Throw Ratio:	1.15-1.9
Optical Zoom:	1.65x
Digital Zoom:	1.0x-2.0x
Image Size:	50"-300"
Throw Distance:	1.24-7.43m (100"@2.48m)
Keystone:	H: +/-30° , V: +/-25°
Lens Shift V. Range:	Yes (+9.2%, -2.4%)
Lens Shift H. Range:	Yes (+2.5%, -2.5%)
Audible Noise (Normal):	34dB
Audible Noise (Eco):	32dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	1
Composite:	1
HDMI:	3 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1
Audio-in (RCA R/L):	1
Microphone in:	1
3D VESA (Sync):	1
HDBaseT:	1
RJ45 Input:	1 (LAN control)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	5W x 2
USB Type A (Power):	1 (5V / 1.5A)

CONTROL

RS232 (DB 9-pin male):	1
RJ45:	1
USB Type Mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Operating Temperature:	0~40°C
Net Weight:	11.0kg
Dimensions (WxDxH) with Adjustment Foot:	360x440x161mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Total 22 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1 (w/ laser pointer)
QSG:	1