

ViewSonic  PROJECTOR
PA503W

Key Features


HIGHER BRIGHTNESS. LONGER LAMP LIFE.

- 22,000:1 contrast ratio
- SuperColor™ technology
- 5 color modes
- Auto power off
- Vertical keystone



Product Description

The ViewSonic PA503W offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, PA503W projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColor™ technology offers a wider range of displayable color ensuring true-to-life colors in both bright and dark environments without sacrificing image quality.

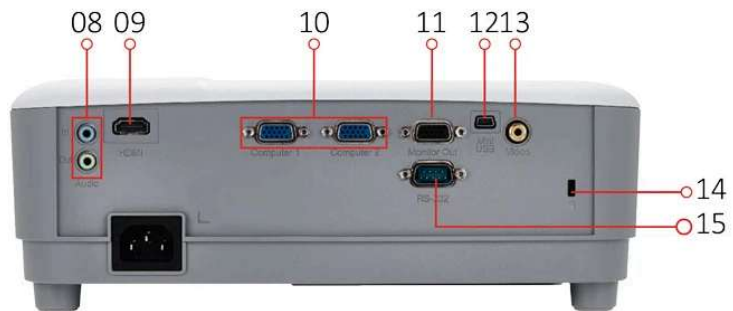

- | | | |
|------------------|-----------------|-----------|
| 1. Keypad | 8. Audio in/out | 15. RS232 |
| 2. LED indicator | 9. HDMI | |
| 3. Lamp cover | 10. Dual VGA | |
| 4. Security lock | 11. VGA out | |

5. Zoom/Focus
6. Front IR
7. Projection Lens

12. Mini USB
13. Video
14. Kensington® Lock Slot

Visit Us

www.viewsonic.com

SPECIFICATION

Projection System:	0.65" WXGA
Native Resolution:	1280x800
Brightness:	4000 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	22000:1
Display Color:	1.07 Billion Colors
Light Source Type:	200W UHP Lamp
Light Source Life (hours) with Normal Mode:	6000
Light Source Life (hours) with SuperEco Mode:	15000
Lens:	F=2.56-2.68, f=22-24.1mm
Projection Offset:	100% +/-5%
Throw Ratio:	1.55-1.70
Optical Zoom:	1.1x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	1m-10.98m (100"@3.34m)
Keystone:	+/- 40° (V)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz
INPUT	
Computer in (share with component):	2
Composite:	1
HDMI:	1 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1
OUTPUT	
Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	2W
CONTROL	
RS232 (DB 9-pin male):	1
USB Type Mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 260W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.2kg
Gross Weight:	3.24kg
Dimensions (WxDxH) with Adjustment Foot:	294x218x110mm
Packing Dimensions:	365x300x188mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, Hindi, Arabic, Vietnamese, Total 22 languages
User Guide Language:	English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	Yes
Air Filter:	Yes (CN Only)
Warranty Card:	Yes (CN Only)

OPTIONAL ACCESSORY

Lamp/Light Source:	RLC-109
Air Filter:	RSPL
Wall/Ceiling Mount:	PJ-WMK-007
Carry Bag:	PJ-CASE-008