

# PHILIPS

5K2K UltraWide  
Thunderbolt™ monitor

Business Monitor

6000 series

40 (39.7"/100.9 cm diag.)

5120 x 2160 (5K2K)

40B1U6903CH



## Simply brilliant

with a pop-up webcam

The Philips Thunderbolt™ 4 monitor delivers a secure, reliable one-cable docking solution, delivering sharp images, and a noise-cancelling mic lets people hear you clearly. Features a pop-up webcam for quick access and robust security.

### **Thunderbolt™ 4 port for flexibility and performance**

- Simple and powerful daisy chaining for multi-monitor setups
- Delivers up to 90 W of power for devices on a single port
- Lightning-fast connectivity for data, video and Ethernet

### **Vibrant colours, incredible depth, finest details**

- IPS LED wide view technology for image and colour accuracy
- UltraWide 5K2K (5120 x 2160) resolution for fine details

### **Designed for the way you work**

- Windows Hello Certified – Seamless, Secure Access
- Secure sign-in with pop-up webcam
- Eyesafe-certified blue light protection and colour accuracy
- Built-in KVM switch to easily switch between sources
- Collaboration-ready webcam with noise-cancelling mic.
- Earphone hook: Accessory within reach

### **Designed for sustainability**

# Business Monitor

5K2K UltraWide Thunderbolt™ monitor

40B1U6903CH/00

## Highlights

### Thunderbolt daisy chain setup




Daisy chaining allows you to drive multiple monitors and devices from a single Thunderbolt port on your laptop. From the Thunderbolt port of your laptop, connect to this monitor, then from the second Thunderbolt port on this monitor you can connect to a second 4K monitor.

### Thunderbolt™ 4 monitor



This Philips docking monitor is equipped with Thunderbolt™ 4 connection. Compared with conventional USB-C monitors, Thunderbolt™ 4 technology provides lightning-fast 40 Gbps data transfer speeds, supports high-resolution video, offers multi-stream transport for daisy chaining, has up to 90 W of power delivery to external devices and can provide a stable 1 Gbit/s Ethernet connection.

### IPS technology

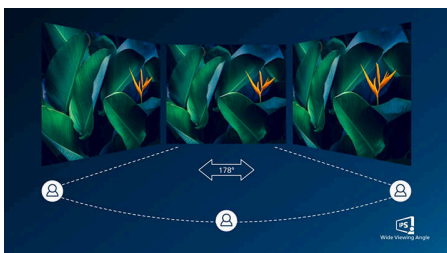

IPS displays use an advanced technology that gives you extra-wide viewing angles of 178/178 degrees, making it possible to view the

display from almost any angle. Unlike standard TN panels, IPS displays give you remarkably crisp images with vivid colours, making them ideal not only for Photos, movies and web browsing, but also for professional applications that demand colour accuracy and consistent brightness at all times.

### UltraWide 5K2K



With UltraWide 5K2K resolution, the colour depth is delivered more vividly and the fine details of the visuals can't be missed. Productivity is redefined thanks to the additional screen space.

### Pop-up webcam



Philips' innovative and secure webcam pops up when you need it and securely tucks back into the monitor when you are not using it. The webcam is also equipped with advanced sensors for Windows Hello facial recognition, which conveniently logs you into your Windows devices in less than 2 seconds, 3 times faster than a password.

### TUV Rheinland Eyesafe



Philips display meets the TUV Rheinland Eyesafe® standard to truly protect you from long exposure to blue light. The always-on blue light filter not only helps reduce digital eye strain, but also guarantees colour integrity.

### MultiClient Integrated KVM



With the MultiClient Integrated KVM switch, you can control two separate PCs with one monitor-keyboard-mouse setup. A convenient button allows you to quickly switch between sources. Handy with setups that require dual PC computing power or sharing one large monitor to show two different PCs.

### Windows Hello Certified



Log in faster and more securely with Windows Hello. This Philips monitor is Windows Hello Certified, offering quick facial recognition and effortless access — every time you power on.



## Highlights


### Webcam and noise-cancelling mic



This Philips monitor comes with a built-in 5 MP webcam, noise-cancelling microphone and speakers, making it perfect for working from home and collaborating remotely. It is equipped with advanced sensors that work seamlessly with Windows Hello facial recognition, allowing you to log into your Windows devices in less than 2 seconds. For added privacy, a physical camera switch lets you disable the webcam when not in

use. The noise-cancelling microphone and dual 5 watt integrated speakers ensure clear communication.


### PowerSensor

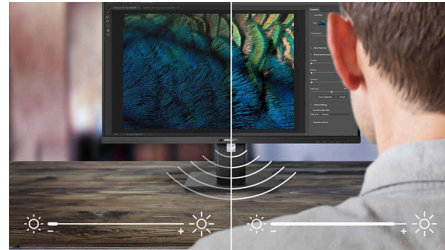

PowerSensor is a built-in 'people sensor' that transmits and receives harmless infrared signals to determine if the user is present and then automatically reduces monitor brightness when

then user steps away from the desk, cutting energy costs by up to 80 percent and prolonging monitor life

### Earphone hook

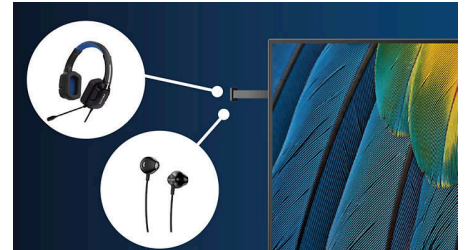

The unique design of the headphone hook on the side of the Philips monitor brings the tidiness and cable management of your working station to the next level. Its easy access lets you put aside your headphones easily, making sure that all of the accessories you need are within reach.



## Specifications

### Picture/Display

**Panel Size:** 39.7 inch/100.9 cm

**Aspect ratio:** 21:9

**LCD panel type:** IPS technology

**Backlight type:** W-LED system

**Pixel pitch:** 0.1815 x 0.1815 mm

**Brightness:** 300 cd/m<sup>2</sup>

**Display colours:** Colour support 1.07 billion colours (8-bit + A-FRC)

**Colour gamut (typical):** NTSC 103%\*, sRGB 134%\*

**Colour gamut (min.):** DCI-P3 98%\*

**Contrast ratio (typical):** 1000:1

**SmartContrast:** 80,000,000:1

**Response time (typical):** 4 ms (Grey to Grey)\*

**Viewing angle:** 178° (H)/178° (V), @ C/R > 10

**Picture enhancement:** SmartImage

**Maximum resolution:** 5120 x 2160 @ 75 Hz\*

**Effective viewing area:** 929.28 (H) x 392.04 (V) - at a 2500 R curvature\*

**Scanning Frequency:** HDMI: 30 - 140 kHz (H)/30 - 60 Hz (V); DP/Thunderbolt 4: 30 - 170 kHz (H)/48 - 75 Hz (V)

**sRGB**

**Delta E:** < 2

**SoftBlue**

**Flicker-free**

**Pixel Density:** 140 PPI

**Display Screen Coating:** Anti-Glare, 3H, Haze 25%

**SmartUniformity:** 93 ~ 105%

### EasyRead

**Adaptive sync**

**HDR:** HDR 10 supported

### Connectivity

**Signal Input:** HDMI 2.0 x 2, DisplayPort 1.4 x 1, Thunderbolt 4 x 1 (upstream, Data, Video, PD 90 W)

**Sync Input:** Separate Sync

**Audio (In/Out):** Audio out/Microphone in combo jack

**RJ45:** Ethernet LAN up to 1 G\*, Wake on LAN

**Signal Output:** Thunderbolt 4 out x 1 (downstream, Data, PD 15 W)

**HDCP:** HDCP 1.4 (HDMI/DisplayPort/USB-C), HDCP 2.2 (HDMI/DisplayPort/USB-C)

**HBR3:** HBR 3 (TBT4/DisplayPort)

**USB Hub:** USB 3.2 Gen 2/10 Gbps, USB-B upstream x 1, USB-A downstream x 4 (with 1 for fast charge B.C 1.2), USB-C downstream x 1 (Data, PD 45 W)

### Power Delivery

**Max power delivery:** Up to 90 W (5 V/3 A, 7 V/3 A, 9 V/3 A, 10 V/3 A, 12 V/3 A, 15 V/3 A, 20 V/4.25 A)

**Version:** USB PD version 3.0

### Convenience

**Built-in Speakers:** 5 W x 2

**Plug and Play Compatibility:** DDC/CI, Mac OS X, sRGB, Windows 11/10/8.1/8

**User convenience:** Mic, SmartImage, Input, User, Menu, Power On/Off

**OSD Languages:** Brazil Portuguese, Czech, Dutch, English, French, Finnish, German, Greek, Hungarian, Italian, Japanese, Korean, Portuguese, Polish, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian

**Other convenience:** Kensington lock, Earphone hook, VESA mount (100 x 100 mm)

**Control software:** SmartControl

**MultiView:** PIP/PBP mode, 2 x devices

**Built-in webcam:** Pop-up 5.0 megapixel camera with a microphone and LED indicator (for Windows Hello)

**KVM:** Yes (TBT4/USB-B)

**Noise cancellation**

### Stand

**Height adjustment:** 150 mm

**Swivel:** -/+45 degree

**Tilt:** -5/15 degree

### Power

**ECO mode:** 44.6 W (typ.)

**Power supply:** Built-in, 100–240 VAC, 50–60 Hz

**Off mode:** Zero watts with AC switch

**On mode:** 58.3 W (typ.) (Energy Star test method)

**Standby mode:** 0.44 W (typ.)

**Power LED indicator:** Operation - White, Standby mode - White (flashing)

**Energy Label Class:** G

## Specifications

### Dimensions

Packaging in mm (W x H x D):

1150 x 565 x 211 mm

Product without stand (mm):

948 x 426 x 109 mm

Product with stand (max height):

948 x 605 x 236 mm

### Weight

Product with packaging (kg): 17.17 kg

Product with stand (kg): 13.50 kg

Product without stand (kg): 10.30 kg

### Operating conditions

Altitude: Operation: +12,000 ft (3658 m), Non-operation: +40,000 ft (12,192 m)

Temperature range (operation): 0°C to 40 °C

Relative humidity: 20%-80 %

Temperature range (storage): -20°C to 60 °C

MTBF (demonstrated): 70,000 hrs (excluded backlight)

### Sustainability

Environmental and energy: PowerSensor, LightSensor, Energy Star 8.0, EPEAT\*, RoHS, TCO Certified Edge

Post-consumer recycled plastic: 85%

Recyclable packaging material: 100 %

Specific Substances: Mercury free, PVC/BFR free housing

### Compliance and standards

Regulatory Approvals: CB, CE Mark, FCC Class B, ICES-003, CU-EAC, EAEU RoHS, TUV Ergo, TUV/GS, eyesafe® CERTIFIED 2.0, cETLus, TÜV Rheinland Low Blue Light (Hardware Solution)

### Cabinet

Finish: Texture

Foot: Black

Front bezel: Black

Rear cover: Black

### What's in the box?

Cables: HDMI cable, DisplayPort cable, TBT4 cable, Power cable

Monitor with stand

User Documentation

