

ViewSonic LCD DISPLAY

VX3276-4K-MHD-2


Key Features

- UHD (3840 x 2160) resolution for crisp, clear image detail
- SuperClear® VA-Type Panel technology for vivid picture quality and wider viewing angles
- HDR10 content support delivers vivid colors and brightness that exceed standard monitors
- Flexible connectivity with DisplayPort, mini DP, and two HDMI ports
- Flicker-Free and Low Blue Light advanced eye care technology for comfortable viewing



Product Description

Whether for office use or for enjoying entertainment at home, the ViewSonic® VX3276-4K-MHD-2 is designed to take your viewing experience to another level. With VA-Type panel technology and a sleek frameless design, this monitor provides a near-seamless viewing experience ideal for multi-monitor setups. Stunning 4K Ultra HD resolution delivers 4-times more pixels than Full HD monitors, which boosts efficiency and image detail needed for work or play. A mega dynamic contrast ratio of 80M:1 delivers enhanced image depth for a better user experience. Moreover, HDR10 content support delivers vivid colors and brightness that exceed standard monitors. Built-in HDMI, DisplayPort, and mini DP inputs deliver flexible connectivity options for a wide range of devices.

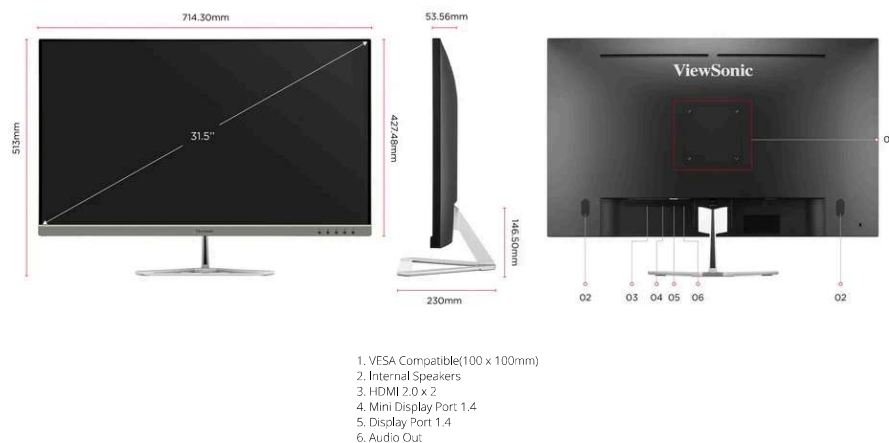

Visit Us

www.viewsonic.com



DISPLAY

Display Size (in.):	32
Viewable Area (in.):	31.5
Panel Type:	VA Technology
Resolution:	3840 x 2160
Resolution Type:	UHD (Ultra HD)
Static Contrast Ratio:	3,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
High Dynamic Range:	HDR10
Light Source:	LED
Brightness:	350 cd/m² (typ)
Colors:	16.7M
Color Space Support:	8 bit true
Aspect Ratio:	16:9
Response Time (Typical GTG):	4ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Low Blue Light:	Hardware and software solution
Flicker-Free:	Yes
Color Gamut:	NTSC: 85% size (Typ) sRGB: 120% size / 99% coverage (Typ)
Pixel Size:	0.182 mm (H) x 0.182 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	3840x2160
Mac® Resolution (max):	3840x2160
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	3840x2160

CONNECTOR

3.5mm Audio Out:	1
HDMI 2.0 (with HDCP 2.2):	2
DisplayPort:	1
Mini DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2.5Watts x2
--------------------	-------------

POWER

Eco Mode (Conserve):	28W
Eco Mode (optimized):	34.5W
Consumption (typical):	42.5W
Consumption (max):	43W
Voltage:	AC 100-240V
Stand-by:	0.3W
Power Supply:	Internal Power Supply

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Key 1 (game mode), Key 2, Key 3, Key 4, Key 5 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	HDMI (v2.0): 15 ~ 140KHz, DisplayPort (v1.4): 24 ~ 140KHz, mini DisplayPort (v1.4): 24 ~ 140KHz
Frequency Vertical:	HDMI (v2.0): 24 ~ 75Hz, DisplayPort (v1.4): 50 ~ 75Hz, mini DisplayPort (v1.4): 50 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4), PCI-E - mini DisplayPort (v1.4)
---------------	---

ERGONOMICS

Tilt (Forward/Back):	-5° / 20°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	14.3
Net Without Stand (lbs):	12.8
Gross (lbs):	17.9

WEIGHT (METRIC)

Net (kg):	6.5
Net Without Stand (kg):	5.8
Gross (kg):	8.1

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	30.3 x 20.1 x 4.9
Physical (in.):	28.12 x 20.2 x 9.06
Physical Without Stand (in.):	28.12 x 16.83 x 2.33

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	770 x 510 x 125
Physical (mm):	714.3 x 513 x 230
Physical Without Stand (mm):	714.3 x 427.48 x 59.22

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, CEC, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO
PACKAGE CONTENTS:	VX3276-4K-MHD-2 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v2.0; Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Power Management:	Energy Star standards

