

ViewSonic® LCD DISPLAY VA24E1-H


Key Features

- SuperClear® IPS panel
- Full HD 1080p resolution
- 120Hz refresh rate delivers fluid visuals
- HDMI and VGA inputs for flexible connectivity
- Various ViewMode color rendering options



Product Description

The ViewSonic VA24E1-H is a 24" Full HD monitor featuring HDMI and VGA inputs for business and home use. The optimal screen performance and comfortable viewing without tearing or stuttering are delivered through 120Hz refresh rate, blue light filter, and various ViewMode presets. Simply expand your workspace and experience truly seamless multitasking on just one screen with a VESA-compatible mount at a low power consumption.

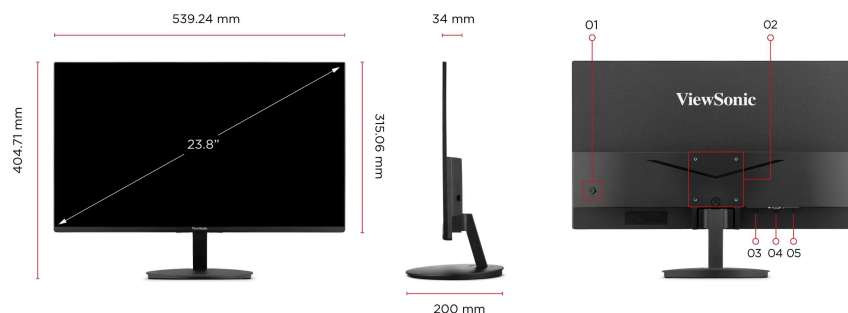

1. Joystick Key
2. VESA Compatible(Wall Mount 75x75mm)
3. HDMI
4. VGA
5. Power In

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,500:1 (typ)
Dynamic Contrast Ratio:	3M:1
Light Source:	LED
Brightness:	250 cd/m² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	120
Low Blue Light:	Software solution
Color Gamut:	NTSC: 77% size (Typ) sRGB: 109% size (Typ)
Pixel Size:	0.275 mm (H) x 0.275 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)

POWER

Eco Mode (Conserve):	14W
Eco Mode (optimized):	15W
Consumption (typical):	21W
Consumption (max):	24W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

CONTROLS

Physical Controls:	Up, Right, Down, Left, Power
On Screen Display:	Input Select, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	75 x 75 mm
------------------	------------

INPUT SIGNAL

Frequency Horizontal:	RGB Analog: 24 ~ 86KHz, HDMI (v1.4): 30 ~ 145KHz
Frequency Vertical:	RGB Analog: 48 ~ 75Hz, HDMI (v1.4): 48 ~ 120Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMICS

Tilt (Forward/Back):	-5° / 15°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	5.1
Net Without Stand (lbs):	4.6
Gross (lbs):	7.7

WEIGHT (METRIC)

Net (kg):	2.3
Net Without Stand (kg):	2.1
Gross (kg):	3.5

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	23.8 x 15.5 x 4.7
Physical (in.):	21.23 x 15.93 x 7.87
Physical Without Stand (in.):	21.23 x 12.4 x 1.34

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	604 x 393 x 120
Physical (mm):	539.24 x 404.71 x 200
Physical Without Stand (mm):	539.24 x 315.06 x 34

GENERAL

Regulations:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO
PACKAGE CONTENTS:	VA24E1-H x1, HDMI Cable (v1.4; Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Power plug x1 or 2 (by country)
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market