

ViewSonic® LCD DISPLAY VG3419C-2


Key Features

- 21:9 ultra-wide screen with UWQHD 3440 x 1440 resolution
- Integrated Docking Station with Ethernet, and delivers up to 96W charging via USB-C connection
- 1500R Curved Panel
- 120Hz Refresh rate delivers fluid visuals
- Advanced ergonomics with swivel, height adjustment and a -5°~20° tilt angle



Product Description

The VG3419C-2 is a 34" ultra-wide curved docking monitor with UWQHD 3440 x 1440 resolution. Its 21:9 aspect ratio and 1500R curvature provide an immersive viewing experience. Offering USB-C and Ethernet connectivity, this curved docking monitor dubs as a complete hub for charging, data, network, and peripherals, effectively reducing cable clutter and simplifying cable management. With ergonomic flexibility, you can tilt and adjust the height of the VG3419C-2 to have a smooth workflow as a professional multitasker. Thought for multi-tasking and productivity, the VG3419C-2 comes with a built-in KVM switch function to connect and control multiple systems.

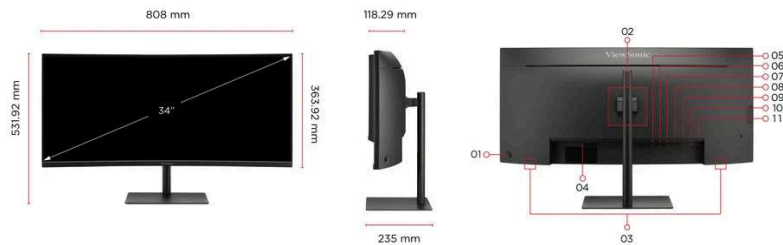

- | | |
|---|-------------------------------|
| 1. Joystick Key | 7. USB Type C |
| 2. VESA Compatible(Wall Mount 100 × 100 mm) | 8. USB Type B 3.2 Downstream |
| 3. Speakers | 9. Ethernet (RJ45) |
| 4. Power In | 10. USB Type A 3.2 DownStream |
| 5. HDMI | 11. Audio Out |
| 6. DisplayPort | |

Visit Us www.viewsonic.com



DISPLAY

| | |
|------------------------------|--|
| Display Size (in.): | 34 |
| Viewable Area (in.): | 34 |
| Panel Type: | VA Technology |
| Resolution: | 3440 x 1440 |
| Resolution Type: | UWQHD (UltraWide QHD) |
| Static Contrast Ratio: | 3,000:1 (typ) |
| Dynamic Contrast Ratio: | 80M:1 |
| High Dynamic Range: | HDR10 |
| Light Source: | LED |
| Brightness: | 300 cd/m ² (typ) |
| Colors: | 16.7M |
| Color Space Support: | 8 bit true |
| Aspect Ratio: | 21:9 |
| Response Time (Typical GTG): | 3.5ms |
| Response Time (GTG w/OD): | 3.5ms |
| Viewing Angles: | 178° horizontal, 178° vertical |
| Backlight Life (Hours): | 30000 Hrs (Min) |
| Curvature: | 1500R |
| Refresh Rate (Hz): | 120 |
| Low Blue Light: | Software solution |
| Flicker-Free: | Yes |
| Color Gamut: | NTSC: 89% size (Typ) sRGB: 125% size (Typ) |
| Pixel Size: | 0.232 mm (H) x 0.232 mm (V) |
| Surface Treatment: | Anti-Glare, Hard Coating (3H) |

COMPATIBILITY

| | |
|------------------------|---------------------------------------|
| PC Resolution (max): | 3440x1440 |
| Mac® Resolution (max): | 3440x1440 |
| PC Operating System: | Windows 10/11 certified; macOS tested |
| Mac® Resolution (min): | 3440x1440 |

CONNECTOR

| | |
|---|--------------------------------|
| USB 3.2 Type A Down Stream: | 2 |
| USB 3.2 Type B Up Stream: | 1 |
| USB 3.2 Type C Up Stream; DisplayPort Alt mode : | 1 (96W power charger) |
| 3.5mm Audio Out: | 1 |
| HDMI 2.0: | 1 |
| DisplayPort: | 1 |
| Power in: | 3-pin Socket (IEC C14 / CEE22) |
| Ethernet LAN (RJ45): | 1 |

AUDIO

| | |
|--------------------|-----------|
| Internal Speakers: | 2Watts x2 |
|--------------------|-----------|

POWER

| | |
|------------------------|-----------------------|
| Eco Mode (Conserve): | 23.8W |
| Eco Mode (optimized): | 27.9W |
| Consumption (typical): | 32.2W |
| Consumption (max): | 41W |
| Voltage: | AC 100-240V |
| Stand-by: | 0.5W |
| Power Supply: | Internal Power Supply |

ADDITIONAL HARDWARE

| | |
|-----------------------|-----|
| Kensington Lock Slot: | 1 |
| Cable Organization: | Yes |

CONTROLS

| | |
|--------------------|---|
| Physical Controls: | U, R, D, L, EN (power) |
| On Screen Display: | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu |

OPERATING CONDITIONS

| | |
|----------------------------|-----------------------------|
| Temperature: | 32°F to 104°F (0°C to 40°C) |
| Humidity (non-condensing): | 20% to 90% |

WALL MOUNT

| | |
|------------------|--------------|
| VESA Compatible: | 100 x 100 mm |
|------------------|--------------|

INPUT SIGNAL

| | |
|-----------------------|--|
| Frequency Horizontal: | HDMI (v2.0): 30 ~ 160KHz, DisplayPort (v1.4): 30 ~ 185KHz, Type C: 30 ~ 185KHz |
| Frequency Vertical: | HDMI (v2.0): 24 ~ 120Hz, DisplayPort (v1.4): 24 ~ 120Hz, Type C: 24 ~ 120Hz |

VIDEO INPUT

| | |
|---------------|---|
| Digital Sync: | TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.4), Micro-Packet - Type C |
|---------------|---|

ERGONOMICS

| | |
|----------------------|-----------|
| Height Adjust (mm): | 150 |
| Swivel: | 90° |
| Tilt (Forward/Back): | -5° / 20° |

WEIGHT (IMPERIAL)

| | |
|--------------------------|------|
| Net (lbs): | 17.4 |
| Net Without Stand (lbs): | 13.1 |
| Gross (lbs): | 22.9 |

WEIGHT (METRIC)

| | |
|-------------------------|------|
| Net (kg): | 7.9 |
| Net Without Stand (kg): | 6 |
| Gross (kg): | 10.4 |

DIMENSIONS (IMPERIAL) (WXHxD)

| | |
|-------------------------------|----------------------------|
| Packaging (in.): | 39.1 x 19.5 x 6.7 |
| Physical (in.): | 31.81 x 15.03-20.94 x 9.25 |
| Physical Without Stand (in.): | 31.81 x 14.33 x 4.66 |

DIMENSIONS (METRIC) (WXHxD)

| | |
|------------------------------|---------------------------|
| Packaging (mm): | 993 x 495 x 170 |
| Physical (mm): | 808 x 381.92-531.92 x 235 |
| Physical Without Stand (mm): | 808 x 363.92 x 118.29 |

GENERAL

| | |
|-------------------|---|
| Regulations: | Energy Star, EPEAT, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 10.0, EAC, UkrSEPRO, RCM |
| PACKAGE CONTENTS: | VG3419C-2 x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v2.0: Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB A/B Cable (v3.2: Male-Male) x1, Quick Start Guide x1 |
| Recycle/Dispose: | Please dispose of in accordance with local, state or federal laws. |
| Warranty: | *Warranty offered may differ from market to market |
| Power Management: | Energy Star standards, EPEAT |

